


# 102 Series

- Low Profile Recessed Mount
- Surface Mount Bases Available
- ADR Australian Road Approved
- IP67 Rated
- 12 or 12-24 Volt
- 5 Year Warranty

<b>Function</b>	(Stop/Tail)/Indicator/Reverse
<b>Size</b>	130mm round x 12mm
<b>Voltage</b>	12 or 12-24 Volt
<b>LED Qty</b>	21
<b>Cable</b>	36cm with Spade Terminals
<b>Lens</b>	Polycarbonate

<b>Draw</b>	<b>Stop</b>	<b>Tail</b>	<b>Indicator</b>	<b>Reverse</b>
@13.8V	0.31A	0.04A	0.29A	0.15A
@28V	0.19A	0.04A	0.20A	N/A

<b>Approvals</b>	<b>Function</b>	<b>Category</b>	<b>CRN</b>
<b>ADR</b>	Stop/Tail	49/00	42963
<b>ADR</b>	Indicator	6/00 2a	42832
<b>ADR</b>	Reverse	1/00	42826
<b>CTA</b>	Stop/Tail	49/00	CTA-042963
<b>CTA</b>	Indicator	6/00 2a	CTA-042832
<b>CTA</b>	Reverse	1/00	CTA-042826

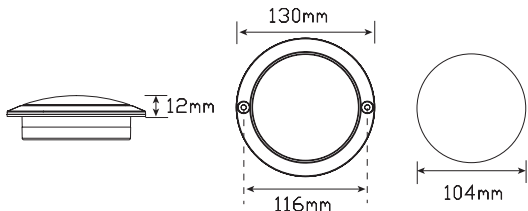

Single Bracket  
**102B1B** - Bulk




Twin Bracket  
**102B2B** - Bulk



Triple Bracket  
**102B3B** - Bulk



Coloured Lens Inactive/Active  
**102R** - 12 Volt, Bulk  
**102RM** - 12-24 Volt, Blister

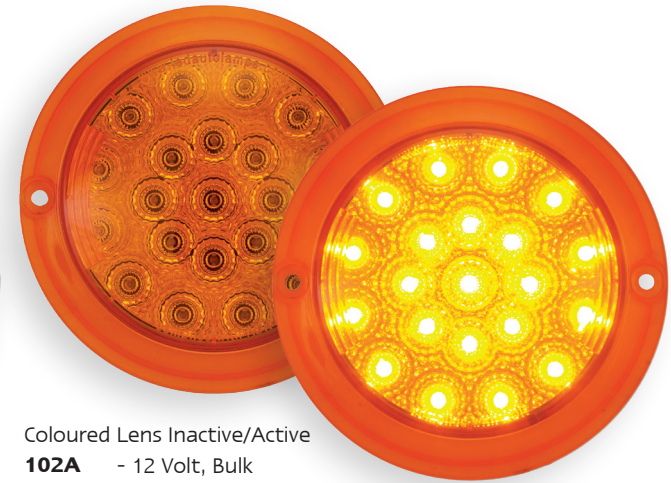

Coloured Lens Inactive/Active  
**102A** - 12 Volt, Bulk  
**102AM** - 12-24 Volt, Blister



Clear Lens Inactive/Active  
**102W** - 12 Volt, Bulk

**ADR**  
Approved  
**IP67**  
Protection  
**5 Year**  
Warranty



## Fitting Instructions

Fit into cutout (cutout 104mm round) using stick on gasket between lamp and fitting surface, run wires at back. Please refer to ADR 13/00 for mounting instructions.



All enquiries P: (03) 9466 7075 E: led@ledtech.com.au, www.ledautolamps.com

All efforts are made to ensure all information is correct and up to date, it can be subject to change without notice. All measurements are in millimeters (mm) and are not to scale.

© All LED Technologies designs are registered throughout the world. - Current as of 22/09/2020