


# 135 Series Front Indicator

- Low Profile Design
- Surface or Recessed Mount Option
- ADR Road Approved
- IP67 100% Waterproof
- 12 Volt or 24 Volt Specific

<b>Function</b>	Front Indicator
<b>Size Bracket</b>	135mm x 38mm x 24mm
<b>Size Grommet</b>	145mm x 48mm x 10mm
<b>Voltage</b>	12 Volt or 24 Volt
<b>LED Qty</b>	18
<b>Cable</b>	40cm cable
<b>Lens</b>	Hardened Acrylic
<b>Bracket</b>	ABS
<b>Grommet</b>	Rubber
<b>Draw</b>	<b>Indicator</b>
<b>@13.8V</b>	0.32A
<b>@28V</b>	0.17A

Approvals	Function	Category	CRN
<b>ADR</b>	Indicator 12V	6/00 Cat1	39340
<b>ADR</b>	Indicator 24V	6/00 Cat1	42131
<b>CTA</b>	Indicator	6/00 Cat1	CTA-060203

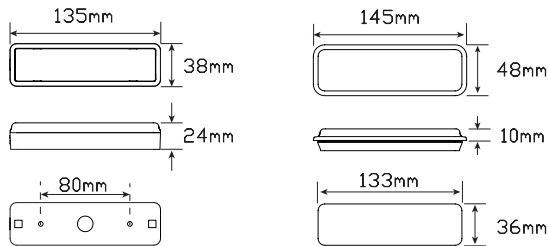

Front Indicator Lamp  
**135CAT1G** - Blister, 12 Volt, Recessed Grommet Mount



Front Indicator Lamp  
**135CAT1** - Blister, 12 Volt, Surface Mount  
**135CAT1B** - Bulk, 12 Volt, Surface Mount  
**135CAT124** - Blister, 24 Volt, Surface Mount  
**135CAT124B** - Bulk, 24 Volt, Surface Mount



Part No. 135G  
 Rubber Grommet

## Fitting Instructions

135CAT1 - Horizontally mount onto flat surface & clip lens into place. 135CAT1G - Recess mount grommet (cut out for grommet 133mm x 36mm) horizontally to the ground & push lens into place.

**ADR**  
 Approved

**100%**  
 Water Proof

**5 Year**  
 Warranty



All enquiries P: (03) 9466 7075 E: led@ledtech.com.au, www.ledautolamps.com

All efforts are made to ensure all information is correct and up to date, it can be subject to change without notice. All measurements are in millimeters (mm) and are not to scale.

© All LED Technologies designs are registered throughout the world. - Current as of 22/09/2020