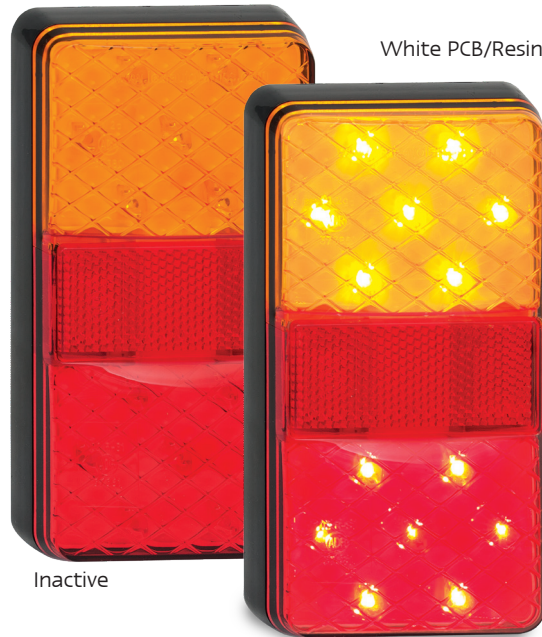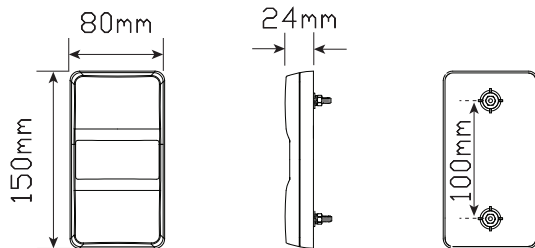# 150 Series Small Trailer Combination

- **Premium Trailer Lamp**
- **Harness System Compatible**
- **Low Profile Design**
- **ADR Approved**
- **IP67 100% Waterproof**
- **Voltage Range 12V or 12-24V**

Function	Stop/Tail/Indicator/Reflector
Size	150mm x 80mm x 24mm
Voltage	12 Volt or 12-24 Volt
LED Qty	14
Cable	40cm cable with Plug
Lens	Hardened Acrylic
Base	ABS

Draw	Stop	Tail	Ind
@13.8V	0.13A	0.04A	0.12A
@28V	0.12A	0.06A	0.07A

Approvals	Function	Category	CRN
ADR	Stop/Tail	49/00	37381
ADR	Indicator	6/00 Cat2a	37380
ADR	Reflector	47/00	38102
CTA (BAR)	Stop/Tail/Ind/Ref	49/00, 6/00 2A, 47/00	CTA-060113
CTA (ARM)	Stop/Tail/Ind/Ref	49/00, 6/00 2A, 47/00	CTA-060294

White PCB/Resin

Harness System Compatibility

Inactive

Stop/Tail/Indicator/Reflector
150BAR - Bulk Boxed, 12 Volt
150BAR2 - Twin Blister, 12 Volt
150ARM - Single Blister, 12-24 Volt

Black PCB/Resin

Inactive

Stop/Tail/Indicator/Reflector
150BARB - Bulk Boxed, 12 Volt

80mm

24mm

150mm

100mm

Fitting Instructions

Surface mount onto flat surface vertically with Indicator at top using bolts in back of lamp, run wire and plug through 10mm hole in fixing surface. Please refer to ADR 13/00 for mounting instructions.

LED autolamps®