


285 Series Front Indicator/Position Lamps

ECE/ADR
Approved

100%
Waterproof

5 Year
Warranty

- ECE/ADR Australian Road Approved
- Low Profile Slimline Design
- Horizontal & Vertical Mount*
- 12 Volt or 24 Volt
- IP67 Rated
- 5 Year Warranty



Clear Lens when Inactive



P/N 285CAT12 - 12 Volt, Front Indicator (ECE Approved)
P/N 285CAT24 - 24 Volt, Front Indicator (ECE Approved)



P/N 285CAW12 - 12 Volt, Front Indicator/Position (ADR Approved)
P/N 285CAW24 - 24 Volt, Front Indicator/Position (ADR Approved)

Function (Front Indicator) (Front Position)

Size 285mm x 25mm x 10mm

Voltage 12 Volt or 24 Volt

LED Qty 16

Cable 85mm cable

Draw Ind Position

@13.8V 0.20A 0.03A

@28V 0.10A 0.02A

Approvals	Function	Category	CRN
ADR	Position	49/00	49523
ADR	Indicator	6/00	49541
CTA	Front End/Indicator	49/00, 6/00	CTA-060115


Approvals	Function	Approval
ECE	Indicator	E9*6R01/28*22182*00
CTA	Indicator 6/00	CTA-060122

*Approved for Horizontal & Vertical Mount, excluding
P/N. 285CAW12
P/N. 285CAW24


Fitting Instructions

Surface mount. Remove end caps by following the instructions below, fix to flat surface with screws supplied then refit end caps. Please refer to ADR 13/00 for mounting instructions.



1. Insert the tip of the screw driver into the slot highlighted in red.



2. Twist away from the clip GENTLY! Until the end cap unclips.



2. Twist away from the clip GENTLY! Until the end cap unclips on the other side.

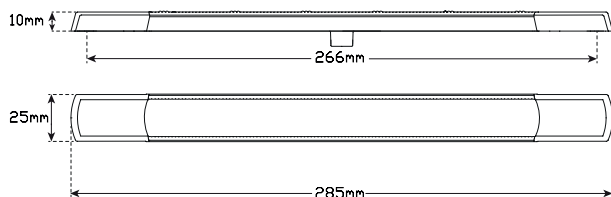

All enquiries P: (03) 9466 7075 E: led@ledtech.com.au, www.ledautolamps.com

All efforts are made to ensure all information is correct and up to date, it can be subject to change without notice. All measurements are in millimeters (mm) and are not to scale.

© All LED Technologies designs are registered throughout the world. - Current as of 22/09/2020