


High Power Emergency Flashing Lamps

- 14 Flash Patterns
- 3M Tape/Screw Fitting
- Synchronising Wire
- High Powered 3 Watt LEDs
- SAE J595 Class 1
- IP67 100% Water proof
- 3 Year Warranty

**14 Flash
Patterns**
**IP67
Protection**
**3 Year
Warranty**

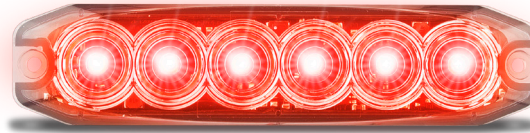


Part No. 120035RM



Part No. 120035BM



Part No. 120035WM

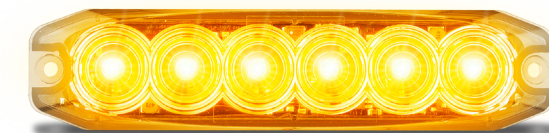

Part No. 120035AM



Clear Lens when Inactive

Function Emergency Lamp

Size 131mm x 30mm x 8mm

Voltage Multivolt 12-24V

LED Qty 6 x 3 Watt

Cable 25cm

Draw	Constant	Strobe
@13.8V	0.29A	0.72-0.005A
@28V	0.153A	0.36-0.008A

Approvals ECE R10 Compliant
SAE J595 Class 1 W-1 16DOT
Flash Patterns 8-12 only*

Flash Selection


1. Connect Red wire to power and Black wire to earth to power the lamp.
2. Tap Brown wire to power to cycle through the 11 flash patterns.
3. Hold Brown wire to power for 7 seconds to reset to the start (Constant Flash Pattern #1).

Simultaneous or Alternating Flash (when using multiple units)

1. To enter grouping mode, connect all Red and Brown wires together, then connect to power. Each lamp will flash to identify which group they belong to.
Single Flash = Group 1, Double Flash = Group 2.
2. While maintaining power to Red wires, remove the Brown wires from power.
3. To change groups, tap Brown wire to power.
Lamps that are set to the same group will flash simultaneously.
Lamps that are in opposite groups will alternate flash.
4. Once lamps are in desired group, disconnect Red wires from power then reconnect to power to exit grouping mode.
5. Connect all brown wires together to synchronise lamps. (Hold all brown wires to power for 7 seconds to reset all flash patterns to start)

NOTE: Maximum of 20 lamps can be Synchronized together.

Flash Pattern Selection*			
1	Constant On	8	Single all (SAE)
2	Single (2Hz)	9	Double all (SAE)
3	Double (2Hz)	10	Quad all (SAE)
4	Quad (2Hz)	11	Quint all (SAE)
5	Random	12	Ultra all (SAE)
6	Double (Split)	13	Single-Quad all
7	Quad (Split)	14	Constant/Double

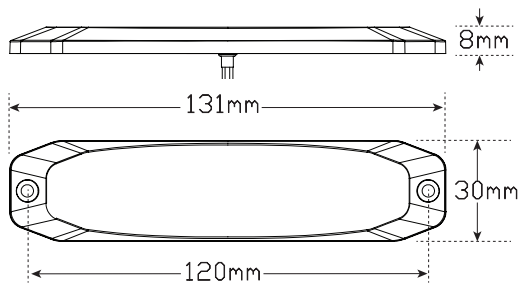

All enquiries P: (03) 9466 7075 E: led@ledtech.com.au, www.ledautolamps.com

All efforts are made to ensure all information is correct and up to date, it can be subject to change without notice. All measurements are in millimeters (mm) and are not to scale.

© All LED Technologies designs are registered throughout the world. - Current as of 14/05/2019