

102 Series Clear Lens

- Low Profile Recessed Mount
- Surface Mount Bases Available
- ADR Australian Road Approved
- IP67 Rated
- 12 or 12-24 Volt
- 5 Year Warranty

Function (Stop/Tail)/Indicator/Reverse
Size 130mm round x 12mm
Voltage 12 or 12-24 Volt
LED Qty 21
Cable 36cm with Spade Terminals
Lens Polycarbonate

Draw	Stop	Tail	Indicator	Reverse
@13.8V	0.31A	0.04A	0.29A	0.15A
@28V	0.19A	0.04A	0.20A	N/A

Approvals	Function	Category	CRN
ADR	Stop/Tail	49/00	42963
ADR	Indicator	6/00 2a	42832
ADR	Reverse	1/00	42826
CTA	Stop/Tail	49/00	CTA-042963
CTA	Indicator	6/00 2a	TBA
CTA	Reverse	1/00	CTA-042826




Clear Lens when Inactive
102RC - 12V, Bulk
102RCM - 12-24 Volt, Blister

Clear Lens when Inactive
102AC - 12V, Bulk
102ACM - 12-24 Volt, Blister



Clear Lens Inactive/Active
102W - 12 Volt, Bulk

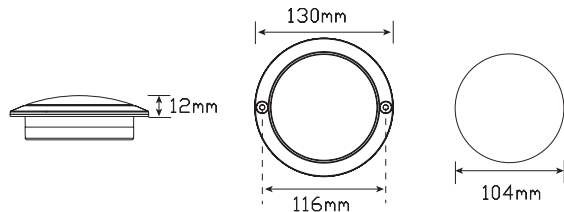

Triple White Bracket
102W3B - Bulk

Fitting Instructions

Fit into cutout (cutout 104mm round) using stick on gasket between lamp and fitting surface, run wires at back. Please refer to ADR 13/00 for mounting instructions.

ADR
Approved
IP67
Protection
5 Year
Warranty



All enquiries P: (03) 9466 7075 E: led@ledtech.com.au, www.ledautolamps.com

All efforts are made to ensure all information is correct and up to date, it can be subject to change without notice. All measurements are in millimeters (mm) and are not to scale.

© All LED Technologies designs are registered throughout the world. - Current as of 22/09/2020