

275 Series Rear Combination Lamp



ADR
Approved
100%
Waterproof
5 Year
Warranty

- Inbuilt Reflex Reflector
- 12 Volt or 12-24 Volt Options
- ADR Road Approved
- IP67 Dust & Waterproof
- 5 Year Warranty


Function	Stop/Tail/Indicator/Reflector
Size	275mm x 100mm x 22mm
Voltage	12 Volt or 12-24 Volt
LED Qty	20
Cable	28cm Sheathed
Lens	PMMA
Base	ABS

Draw	Stop	Tail	Ind
@13.8V	0.23A	0.04A	0.22A
@28V	0.12A	0.04A	0.12A

Approvals	Function	Category	Approval No.
ADR	Stop/Tail	49/00	38658
ADR	Indicator	6/00 2a	38657
ADR	Reflector	47/00	49300
CTA	Stop/Tail/Ind/Ref	49/00, 6/00 2a, 47/00	CTA-060141

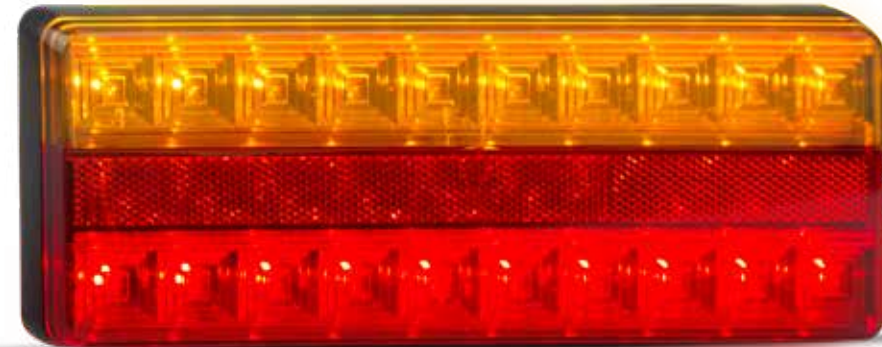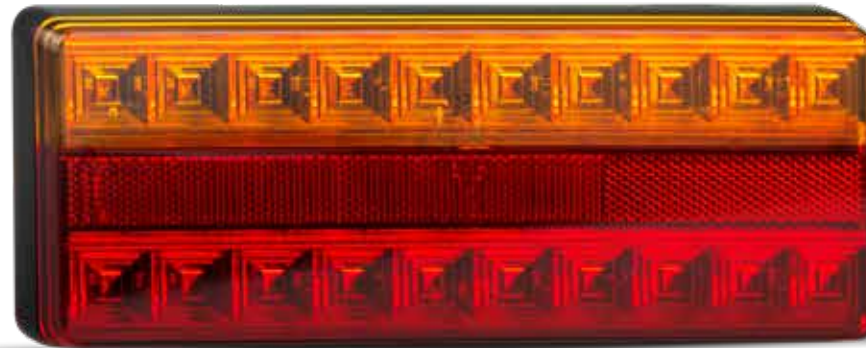

Part Numbers
275AR - 12 Volt, Blister
275MAR - 12-24 Volt, Blister



Fitting Instructions

Horizontally mount onto flat surface with Indicator at top using bolts in back of lamp, run wire and plug through 10mm hole in fixing surface. Please refer to ADR 13/00 for mounting instructions.



All enquiries P: (03) 9466 7075 E: led@ledautolamps.com.au, www.ledautolamps.com

All efforts are made to ensure all information is correct and up to date, it can be subject to change without notice. All measurements are in millimeters (mm) and are not to scale.

© All LED Autolamps (AUST) Pty. Ltd. designs are registered throughout the world. - Current as of 29/03/2022

275 Series Rear Combination Lamp

ECE
Approved
100%
Waterproof
5 Year
Warranty

- 275 Series Now with Reverse
- 12 Volt or 12-24 Volt Options
- ECE Road Approved
- IP67 Dust & Waterproof
- 5 Year Warranty

Function	Stop/Tail/Indicator/Reverse
Size	275mm x 100mm x 22mm
Voltage	12 Volt or 12-24 Volt
LED Qty	30
Cable	30cm Sheathed
Lens	Hardened Acrylic
Base	ABS

Draw	Stop	Tail	Ind	Rev
@13.8V	0.21A	0.34A	0.12A	0.23A
@28V	0.10A	0.02A	0.06A	0.10A




Approvals	Function	Approval No.
ECE	Stop/Tail	E9*7R02/27*22169*00
ECE	Indicator	E9*6R01/28*22169*00
ECE	Reverse	E9*23R00/22*22169*00
CTA	Stop/Tail/Ind/Rev	CTA-060145



Inactive



Part Numbers	
275ARW	- 12 Volt, Blister
275ARWB	- 12 Volt, Bulk
275ARWM	- 12-24 Volt, Blister
275ARWMB	- 12-24 Volt, Bulk



Fitting Instructions

Horizontally mount onto flat surface with Indicator at top using bolts in back of lamp, run wire and plug through 10mm hole in fixing surface. Please refer to ADR 13/00 for mounting instructions.



All enquiries P: (03) 9466 7075 E: led@ledautolamps.com.au, www.ledautolamps.com

All efforts are made to ensure all information is correct and up to date, it can be subject to change without notice. All measurements are in millimeters (mm) and are not to scale.

© All LED Autolamps (AUST) Pty. Ltd. designs are registered throughout the world. - Current as of 29/03/2022