

380 Series Single Function

- Recessed mount
- Low profile slimline design
- ADR Road Approved
- IP67 100% Water proof
- 12 Volt or 24 Volt
- 5 Year Warranty

ADR
Approved

100%
Water Proof

5 Year
Warranty



Part No. 380R12 - 12 Volt, Blister
Part No. 380R24 - 24 Volt, Blister

Stop/Tail



Part No. 380A12 - 12 Volt, Blister
Part No. 380A24 - 24 Volt, Blister

Indicator




Part No. 380W12 - 12 Volt, Blister

Reverse

Function	(Stop/Tail) (Indicator)(Reverse)
Size	382mm x 25mm x 3mm
Voltage	12 Volt or 24 Volt
LED Qty	18
Cable	40cm cable
Lens	High Impact Acrylic

Draw	Stop	Tail	Ind	Rev
@13.8V	0.16A	0.04A	0.18A	0.14A
@28V	0.12A	0.01A	0.10A	0.09A

Approvals	Function	Category	CRN
ADR	Stop/Tail	49/00	39473
ADR	Indicator	6/00 Cat2a	39470
N/A	Reverse	N/A	N/A

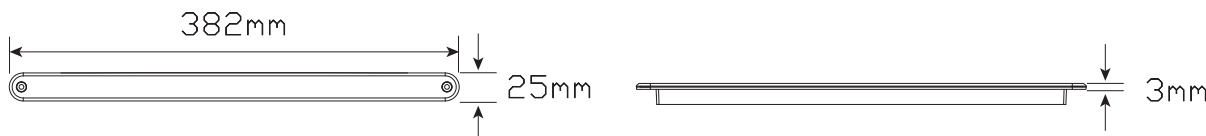

Fitting Instructions

Mount onto flat surface horizontally. Push lamp and grommet into cutout (cut out 340mm x 19mm) in mounting surface, run wires through back and fix with screws supplied at both ends. Please refer to ADR13/00 for mounting instructions.



All enquiries P: (03) 9466 7075 E: led@ledtech.com.au, www.ledautolamps.com

All efforts are made to ensure all information is correct and up to date, it can be subject to change without notice. All measurements are in millimeters (mm) and are not to scale.

© All LED Technologies designs are registered throughout the world. - Current as of 13/2/2017