

102 Series

- Low Profile Recessed Mount
- Surface Mount Bases Available
- ADR Australian Road Approved
- IP67 Rated
- 12 or 12-24 Volt
- 5 Year Warranty

Function (Stop/Tail)/Indicator/Reverse
Size 130mm round x 12mm
Voltage 12 or 12-24 Volt
LED Qty 21
Cable 36cm with Spade Terminals
Lens Polycarbonate

Draw	Stop	Tail	Indicator	Reverse
@13.8V	0.31A	0.04A	0.29A	0.15A
@28V	0.19A	0.04A	0.20A	N/A

Approvals	Function	Category	CRN
ADR	Stop/Tail	49/00	42963
ADR	Indicator	6/00 2a	42832
ADR	Reverse	1/00	42826
CTA	Stop/Tail	49/00	CTA-042963
CTA	Indicator	6/00 2a	CTA-042832
CTA	Reverse	1/00	CTA-042826




Coloured Lens Inactive/Active
102R - 12 Volt, Bulk
102RM - 12-24 Volt, Blister

Coloured Lens Inactive/Active
102A - 12 Volt, Bulk
102AM - 12-24 Volt, Blister



Clear Lens Inactive/Active
102W - 12 Volt, Bulk

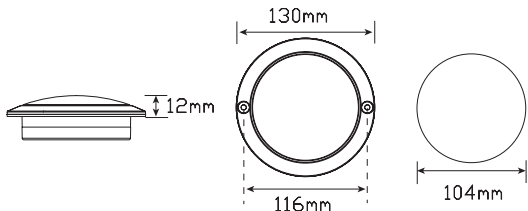

Single Bracket
102B1B - Bulk



Twin Bracket
102B2B - Bulk



Triple Bracket
102B3B - Bulk

Fitting Instructions

Fit into cutout (cutout 104mm round) using stick on gasket between lamp and fitting surface, run wires at back. Please refer to ADR 13/00 for mounting instructions.

ADR
Approved

IP67
Protection

5 Year
Warranty

